
## THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


## NOTES:


- 1. HIGH STRENGTH ELECTROLYTIC COPPER HIGHLY RESISTANT TO CORROSION AND SEASON CRACKING.
- 2. FOR COPPER AND COPPERWELD WIRES ONLY.
- 3. \*CONNECTOR CAN BE USED WITH 3 WIRES, BUT IS NOT CSA APPROVED WITH 3 WIRES.
- 4. \*\*THE CONDUCTOR SIZES SHOWN ARE FOR EQUAL RUN AND TAP COMBINATIONS FOR BOTH SOLID AND STRANDED UNLESS OTHERWISE LISTED.
- 5. PARTS ARE UL LISTED TO UL467 AND UL486. PARTS ARE CSA CERTIFIED.






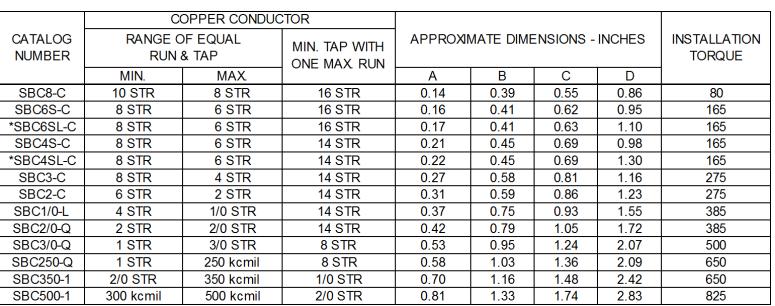

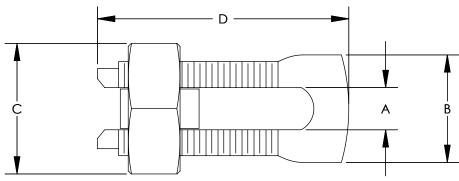





							SBC SERIES - COPPER SPLIT BOLT CONNECTOR CUSTOMER DRAWING
							DATASET FILE NAME  CALE 12/07 SLDDDW/  CALE 12/07 SLDDDW/  CALE 12/07 SLDDDW/  CALE 12/07 SLDDDW/  CALE 12/07 SLDDDW/
							C41312/07.3LDDRW
07	10/15	JHNU	JHNU	RGB	   REVISED MARKING LOCATION   ADDED NOTE TO SPECIFY PARTS ARE UL 486 AND UL467	N10850BM-C41512	UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
06	10/13	JHNU	JHNU	RGB	revised max run & tap for SBC6S-C: 6 Str was 6 Sol	N10850BM-C41512	X ± XXX ± SEE NOTES  XXX ± ANGLES ±
05	3/13	JHNU	JHNU	RGB	REVISED TITLE BLOCK	N10850BM-C41512	THIRD ANGLE PROJECTION DRAWING NUMBER C41512
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY DATE SCALE NONE SHEET 1 OF 1 SIZE B